

Model 200 彈簧止逆閥 Cartridge Spring Check Valves

- ◆現貨-彈簧動作壓力 0.5psi, 訂購 50 個以上, 可指定止逆動作壓力 0.07 psi 至 20psi
- ◆使用溫度範圍: 0°C ~ 120°C ◆不銹鋼彈簧(其他材質選用)
- ◆適合自行設計安裝方式 ◆可機構設計安裝在汞浦出入口、分流排內或軟管內




編號 Part No.	閥體外徑 Body OD	閥體長度 Body Length	特性 Description	彈簧動作壓力 Spring pressure
201/101	0.125" (4.57mm)	0.375" (9.53mm)	管鉤型/適合 1/8"內徑管	2-20psi
203	0.44" (11.13mm)	0.590" (14.99mm)	1/8"外牙固定	0.07-20psi
209	0.44" (11.13mm)	0.489" (12.42mm)	1/8"外牙固定, 流向與 203 相反	0.07-20psi
210	0.250" (6.35mm)	0.392" (9.96mm)	管塞型/適合 1/4"內徑管	0.07-20psi
211	0.250" (6.35mm)	0.475" (12.07mm)	管鉤型/適合 1/4"內徑管	0.07-20psi
213a	0.375" (9.53mm)	0.640" (16.26mm)	槽固定 0.42"/10.658mm	0.11-17psi
214c	1/2" (12.7mm)	0.69" (17.526mm)	槽固定 0.62"/15.748mm	0.11-17psi
215b	0.625" (15.88mm)	0.58" (14.732mm)	槽固定 0.685"/17.399mm	0.11-17psi
218	0.250" (6.35mm)	0.475" (12.07mm)	流向與 211 相反	0.07-20psi
220	0.313" (7.94mm)	0.393" (9.98mm)	管塞型/適合 5/16"內徑管	0.07-20psi
222	0.305" (7.747mm)	0.5" (12.7mm)	單 O-ring 固定	0.07-20psi
230	0.38" (9.53mm)	0.64" (16.26mm)	管塞型/適合 3/8"內徑管	0.11-17psi
232	0.365" (9.27mm)	0.392" (9.96mm)	雙 O-ring 槽固定	0.07-20psi
240	0.500" (12.7mm)	0.625" (15.88mm)	管塞型/適合 1/2"內徑管	0.11-17psi
250	0.625" (15.88mm)	0.630" (16.00mm)	管塞型/槽固定/適合 5/8"內徑管	0.11-7psi
252	0.625" (15.88mm)	0.515" (13.08mm)	單 O-ring 固定	0.11-17psi
254	0.625" (15.88mm)	0.455" (15.88mm)	單 O-ring 固定 0.680"/17.27mm	0.11-17psi
257	0.625" (15.88mm)	0.630" (16.00mm)	手動釋壓閥與 250 流向相反	0.11-7psi
260	0.625" (15.88mm)	0.630" (16.00mm)	管塞型/槽固定/適合 5/8"內徑管	0.11-17psi
270	0.750" (19.05mm)	1.125" (28.58mm)	管塞型/適合 3/4"內徑管	0.19-3psi
274	0.750" (19.05mm)	0.835" (21.21mm)	管塞型/274 閥體比 270 短	0.19-3psi
291	0.625" (15.88mm)	0.393" (9.98mm)	與 254 流向相反	0.11-7psi

Model 500 模組式彈簧止逆閥 Modular Spring Check Valves



模組式止逆閥透視圖

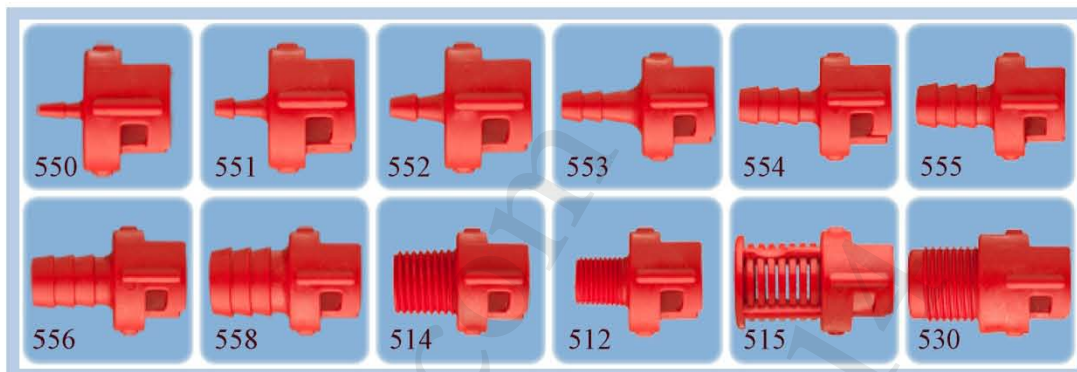

- ◆可任選上圖兩個相同或不同型號組合如 550/554,每個模組合一個卡式止逆閥,
- ◆本產品訂購 25 個以上,可指定需求組合及彈簧動作壓力: 0.11-17Psi

編號 Part No.	管內徑 Tube ID		編號 Part No.	管內徑/NPT Tube ID	
550	1/16"/1.58mm		556	3/8"/9.53mm	
551	3/32"/2.38mm		558	1/2"/12.7mm	
552	1/8"/3.18mm		514	1/8" NPT	
553	3/16"/4.76mm		512	1/4" NPT	
554	1/4"/6.35mm		515	底閥	
555	5/16"/7.94mm		530	手動釋壓閥	

Model AFC 二合一 彈簧止逆閥 Two-in-One Spring Check Valves



- ◆止逆閥與接頭整合為一單體
- ◆現貨的彈簧動作壓力 0.5psi
- ◆可指定需求組合及彈簧動作壓力: 0.07-20psi, 但需訂購 25 個以上

編號 Part No.	牙規 NPT/流向	彈簧動作壓力範圍
A18	1/8" X 1/8" MNPT	0.07-20 psi
A1418	1/8" X 1/4" MNPT	0.07-20 psi
A14	1/4" X 1/4" MNPT	0.07-20 psi
A14M14	1/4" OD X 1/4" MNPT	0.07-20 Psi
A14M14R	1/4" OD X 1/4" MNPT	0.07-20 Psi
A18M14	1/4" OD X 1/8" MNPT	0.07-20 Psi
AF14	1/4" X 1/4" FNPT	0.11-07 psi

AMF 小型彈簧止逆閥 Miniature Spring Check Valves

◆可任選下圖兩個相同或不同型號組合如 AM116/AFL,

◆本產品為客製產品，訂購 25 個以上，可指定需求組合及彈簧動作壓力:0.07-20psi

編號 Part No.	管內徑/Luer				
AM116	1/16"(1.58mm)				
AM18	1/8"(3.18mm)				
AFL	Female Luer 母魯爾				
AML	Male Luer 公魯爾				

彈簧止逆閥 NPT Male thread SPRING CHECK VALVE KYNAR (PVDF)

編號	NPT	長度	通徑	工作壓力/溫度: 220psi於79.4°C Viton O-Ring NPT外牙 止逆動作壓力:1-2.5psi	
CV18PVDF	1/8"	25.40mm	2.38mm		
CV14PVDF	1/4"	35.71mm	4.76mm		
CV38PVDF	3/8"	38.10mm	6.35mm		
CV12PVDF	1/2"	46.03mm	8.73mm		

編號	適用管內徑	材質	L	L1 & L2
210AB	1/16" (1.5mm)	ABS	20.9mm	8.5mm
210PS	1/16" (1.5mm)	Polysulfone	20.9mm	8.5mm
220AB	3/32" (2.25mm)	ABS	26.1mm	8.5mm
220PS	3/32" (2.25mm)	Polysulfone	26.1mm	8.5mm
230AB	1/8" (3.17mm)	ABS	30.9mm	8.5mm
230PS	1/8" (3.17mm)	Polysulfone	30.9mm	8.5mm
240AB	5/32" (4mm)	ABS	36.1mm	8.5mm
240PS	5/32" (4mm)	Polysulfone	36.1mm	8.5mm
445AB	0.170" (4.25mm)	ABS	36.1mm	8.5mm
445PS	0.170" (4.25mm)	Polysulfone	36.1mm	8.5mm

